

# Porcelain Paving



Contemporary Paving  
Home of Ceramiche



You can now also download our brochure.



## SCAN ME

Scan this code to download our brochure straight onto your device.



## STAY UP TO DATE

Follow social media pages for up to date information and photos

1. Key Benefits
3. Key Information
5. Midlake Collection
7. Ardesia Collection
9. Ollare Collection
11. Aged Collection
13. Aged Collection
15. Cemento Collection
17. Grano-Pave Collection
19. Bosco (Aequa) Collection
21. Ancillary
23. K2 Eco Paving Grid
25. Design Area
29. Notes

## Welcome

We have compiled a range of products under Contemporary Paving, each offering a modern, high performance and low maintenance alternative to natural stone external paving. Our ranges offer a versatile, durable and a long lasting landscaping solution, whilst achieving a contemporary minimalistic look.

Each range offers a slightly different aspect to suit all tastes and desires. Many of the collections have an internal option to allow your outdoor and indoor spaces to flow seamlessly.



# Benefits of Porcelain Paving



Scratch  
Resistance



Chemical  
Resistance



Anti-Slip  
R11 Slip Rating



Non-Porous



No need to  
seal



Weather  
Resistance



Frost  
Resistance



Heavy Duty



Fire  
Resistance

## Things to look out for:

### *Shade batches:*

*When placing any orders, please note that porcelain has possible shade variations across batches if ordered at different dates. To avoid any shade differences please order everything you need at the same time.*

### *Size Variations:*


*Some pavers have accurate working sizes, please ask for further details.*

## Key Benefits



*Some of the images in this brochure are of products which we do not stock. These products are available to purchase on a bespoke order.*


## Key Information:



5mm Joint




Mixed size packs available



V1

V1

This means slight variation between colour batches



V2

V2

This means more variation between colour batches



V3

V3

This means a heavy variation between colour batches

Word	Term
<b>Vitrified</b>	Referring to a process during production of the tile, which changes the characteristics to become extremely hard and resistant to any type of absorption. This aspect makes the tiles low maintenance.
<b>Rectified</b>	Refers to all 4 edges of the paving being completely smooth and clean cut. A sawn edge is often a very contemporary appearance.
<b>Non-porous</b>	Means any kind of liquid and air cannot penetrate the material, and they just remain on the surface.
<b>Primer</b>	To create the strong, sustainable bond required, brush primer slurry on the underside of each paving tile/slab just prior to laying.
<b>R11</b>	The 'R' rating is the result of independent tests for 'determination of the anti-slip properties'. R11 being deemed suitable for outdoor use.
<b>Sub Base</b>	Referring to the prepared base for the paving to be laid upon. Which is usually compacted crusher run/MOT.
<b>Mortar</b>	This is a wet mixture of sand, cement and water used to bed the paving on your prepared sub base.

# Porcelain Laying Guide

## 20mm Porcelain Laying Guide

Porcelain is a durable product that can be laid in many ways.

Below, are some methods of laying, please use the appropriate method of laying suited to your project. For every laying method, the base that it is laid upon is vital – please ensure the base is prepared to a standard suitable to the laying method chosen.

### Dry Laying

The strength of the 20 mm-thick tiles means that users can lay them directly on to the laying bed without using any adhesive. This technique is particularly versatile and can be used with most common outdoor laying beds, such as grass, gravel, and sand. The elegance of the 20mm slabs means that users can create stylish designs in both homes and public spaces, quickly and easily, without the need of specialist fitters.

### Laying on solid concrete base with flexible adhesive

The advanced technical features of the 2cm-thick collections, combined with the use of a flexible cement adhesive, allow users to create perfectly stable and exceptionally hard-wearing surfaces. The 20mm porcelain slabs used with this laying method can withstand both moving and parked vehicles. Ideal for heavily frequented city areas, for squares, pavements, or cycle paths.

### Raised laying system – K2 Eco Paving Grid

20mm porcelain slabs can be laid in conjunction with a raised fully supported grid. With load bearing pedestals, this fully adjustable system allows the creation of flat floors to be achieved on sloping bases. 'No need for screed' or jointing grouts, means the void created beneath the system acts as drainage, and a means of passing utilities - electrical and/or water supply beneath without invasive groundworks having to be carried out. As well as being economical on cost, quick and easy installation, the **K2 Eco Paving Grid** and pedestals are made from 100% recycled polypropylene, meaning this lightweight & reusable system is particularly useful for covering existing paving, balconies, roof gardens and many other applications.

### Laying on a Sand and Cement full bed mortar

We recommend a minimum of 50mm thick layer of 4/1 sand and cement mix, with sufficient water to make the mortar easy to work with, but to be able to support the slab. With Contemporary Paving porcelain being non-porous, it is very important to coat the underneath of each slab with a priming slurry. This is to improve the adhesion of the slab as it is a bonding agent, marrying the mortar bed to the slab. This is the most popular method of laying, as it is more akin to the laying of traditional paving and is suitable for most area.

## Porcelain disclaimer

The laying guide is for information purposes only.

Please seek advice for each installation, as there are many factors that affect the laying process. Including, ground stability, drainage, and ambient weather conditions.

# Midlake Collection

The Midlake collection offers a natural stone effect porcelain paver. Each range has intense colour variations, mimicing either quartzite, porphyry or slate appearances.

600 x 900 x 20 mm



Matching internal ranges available to order, to create the 'Inside-Out' look



Ardesia



Porfido



Quartz Grey



Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 x 900 x 20 mm	1	0.54	30
Per Pallet	600 x 900 x 20 mm	48	25.92	1320



Midlake Quartz Grey

# Ardesia Collection


With an authentic appearance our Ardesia collection replicates the beauty of natural slate while encompassing the many benefits of porcelain.

600 × 600 × 20 mm

600 × 1200 × 20 mm

Available on special order:

1000 × 1000 × 20 mm

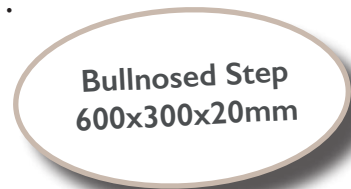

Matching internal ranges available to order, to create the 'Inside-Out' look



Grigio



Anthracite



Piombo



Bullnosed step

Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 × 1200 × 20 mm	1	0.72	32
Per Pallet	600 × 1200 × 20 mm	32	23.04	1045
Per Box	600 × 600 × 20 mm	2	0.72	33
Per Pallet	600 × 600 × 20 mm	64	23.04	1069



Ardesia Anthracite

# Ollare Collection

This range has light, natural markings giving a variation of colour movement within each piece, creating a 'non uniform' look to your outdoor space.

600 × 600 × 20 mm

600 × 1200 × 20 mm

**Available in Bullnosed Step:**

600 × 300 × 20 mm



**Matching internal ranges available to order, to create the 'Inside-Out' look**



Bianco



Beige



Grigio



Gold

Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 x 1200 x 20 mm	1	0.72	32
Per Pallet	600 x 1200 x 20 mm	32	23.04	1045
Per Box	600 x 600 x 20 mm	2	0.72	33
Per Pallet	600 x 600 x 20 mm	64	23.04	1069



Ollare Grigio

# Aged Collection

Our Aged range is a collection of pavers that have an authentic and unique appearance.

600 x 600 x 20 mm  
600 x 900 x 20 mm



Anthracite



Crema



Fossil

Only available in 600x600mm



Quartz Grey



Aged Kandla Grey

Only available in 600x900mm



Aged Black Sandstone

Only available in 600x900mm

Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 x 600 x 20 mm	2	0.72	34
Per Pallet	600 x 600 x 20 mm	64	23.04	1082
Per Box	600 x 900 x 20 mm	1	0.54	23
Per Pallet	600 x 900 x 20 mm	42	22.68	945



Aged Kandla Grey

# Aged Kandla Grey

Aged Kandla Grey is a great alternative to natural sandstone paving. It has all the benefits of a porcelain paver with the same look of natural stone.



Aged Kandla Grey

Only available in 600x900mm

# Extreme Anthracite

The Extreme range covers outdoor settings in structured porcelain stoneware with a shot of energy. Its stone-effect features vary from surface to surface emulating the crags of rock from which their pattern is derived.

This range is also available in Grey and Beige, on a pre-order. The Extreme range replicates natural pigments like grooves of the rock giving a strong, forceful expression to these 20mm-thick.



Anthracite



Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 × 900 × 20 mm	1	0.54	23
Per Pallet	600 × 900 × 20 mm	42	22.68	945



Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 × 600 × 20 mm	2	0.72	34
Per Box	900 × 450 × 20 mm	2	0.81	40



# Cemento Collection

The pavers in this collection are versatile and the sizes allow for them to fit perfectly into any environment, providing a sleek and stylish finish.

400 × 800 × 20 mm

600 × 600 × 20 mm

**Available on special order:**

800 × 800 × 20 mm



**Matching internal ranges available to order, to create the 'Inside-Out' look**



Grigio



Avorio



Raj



Nero

Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	400 x 800 x 20 mm	2	0.64	28
Per Pallet	400 x 800 x 20 mm	48	15.36	660
Per Box	600 x 600 x 20 mm	2	0.72	33
Per Pallet	600 x 600 x 20 mm	64	23.04	1069



Cemento Avorio

# Granopave Collection

This range offers the natural contemporary look of granite, but with all the advantages that porcelain has to offer.

600 x 600 x 20 mm  
600 x 900 x 20 mm



## Handy Hint!

Get the granite look for cheaper with our Granopave porcelain range

££



Light



Medium

## Natural Granite Cobbles

100 x 100 x 30 mm  
100 x 200 x 30 mm



Dark

Also available in Dark  
Natural Granite paving

Why not try our granite cobbles to edge your area with? There is a choice between light, medium and dark granite cobbles.



SCAN ME

Scan this code to go straight to our Granopave page on our website.

Packing	Format	PCS	m <sup>2</sup>	KG
Per Box	600 x 600 x 20 mm	2	0.72	34
Per Pallet	600 x 600 x 20 mm	64	23.04	1082
Per Box	600 x 900 x 20 mm	1	0.54	32
Per Pallet	600 x 900 x 20 mm	42	22.68	945



## DON'T FORGET

Primer is essential to improve the adhesion of the pavers to the bedding, and to protect against the migration of salts and minerals.



Light

# Bosco (Aequa) Collection

The entire beauty and colour of wood, in its many grains and types, in a material not altered by water, sun or frost.

400 × 1200 × 20 mm



Ask about our darker shades, available on pre-order

Also available in 600x600mm, 300x1600mm on a pre-order.



## SCAN ME

Scan this code to go straight to our Bosco (Aequa) Collection page on our website.

## REMEMBER ME





Bianco



Grigio

# Priming Slurry



Quick and easy



20kg paper bags



BS 7533 compliant




Exceptional Bond

Ultra Scape pro-prime slurry primer is used to provide an exceptional bond between your paving element and your bedding mortar. Pro-Prime Slurry provides an exceptional bond between the mortar bed and all types of paving elements. This requires only the addition of water on-site.



## Grout



High performance



Smooth effect finish



Single component

Anthracite

Grigio



Light Beige

Vaniglia

Based on high-strength cements and special additives, it's composition gives this product properties that are unique in it's category.



## ProPave

UltraTileFix ProPave Grout is a high specification, decorative, brush-in external tile jointing solution, suitable for use with granite, porcelain and natural stone. The product is available in 3 colours – cosmic black, natural cashmere and storm grey – the perfect choice for a seamless transition for outside living spaces.



Ideal for use with 20mm porcelain tiles



Can be used in all weather (Walk on in 24-48 hours)



Left over material can be re-used  
Fills joints from 3-20mm




Cashmere



Storm  
Grey



Cosmic  
Black

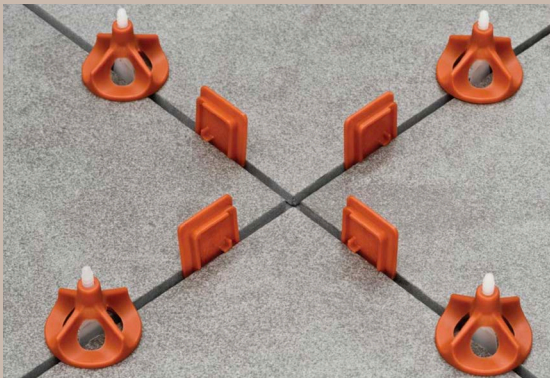

## R.L.S Vite System

Easy application caps and clips able to do with just two fingers. Then once adhesive is set remove with rubber mallet or foot.

Also available is spaces to help with paving and interior tiles.



Cap works on all clips




Levelling system made up of caps and clips



These also work on natural sandstone instalati

# Eco paving grid

K2 raised laying system



The lightweight & reusable **K2 Eco Paving Grid** comprises of a polypropylene support frame and height adjustable pedestals made from 100% recycled materials. The frame holds the Contemporary Paving porcelain without the need for any reinforcement on the back of the slabs. This raised laying system is designed to allow standard, and large format tiles to be laid with the utmost safety standards being met. As the tiles are laid independently on the **K2 Eco Paving Grid**, the system is easy to fit and suitable for any laying design. The height-adjustable pedestals ensure perfectly flat surfaces, and the spacers provided also ensure perfectly uniform joint widths. The **K2 Eco Paving Grid** is specifically designed to be used in various applications, and has many benefits which are listed on page 22.



## SCAN ME


To go straight  
to the grid  
brochure





## Places for use

- Patios
- Balconies
- Roof Gardens
- Garden Buildings/Rooms
- Temporary Gardens
- Outdoor/Indoor Reception Areas
- Plus many more places...

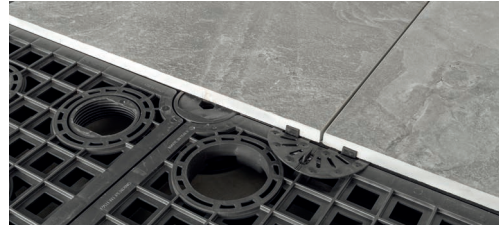

## Advantages

- Creates a level surface from a sloping base
- Height adjustable supports from 50mm to 300mm for perfectly flat surfaces
- Fast and easy installation, easily liftable for inspection, and easily uninstalled
- Lightweight system
- Significantly lighter load as 'no need for screed'
- Cost effective
- Quicker to install, no cost for screed, adhesives or jointing compounds
- Supports any sized tiles and laying pattern
- Plus many more benefits...



*Support made from 100% recycled material*



*Resistance to loads without any reinforcement*



*Fast to fit and remove*




*Stability and safety of the floor's surface*





*Resistance to acids and alkali*




*Multi-size laying patterns*

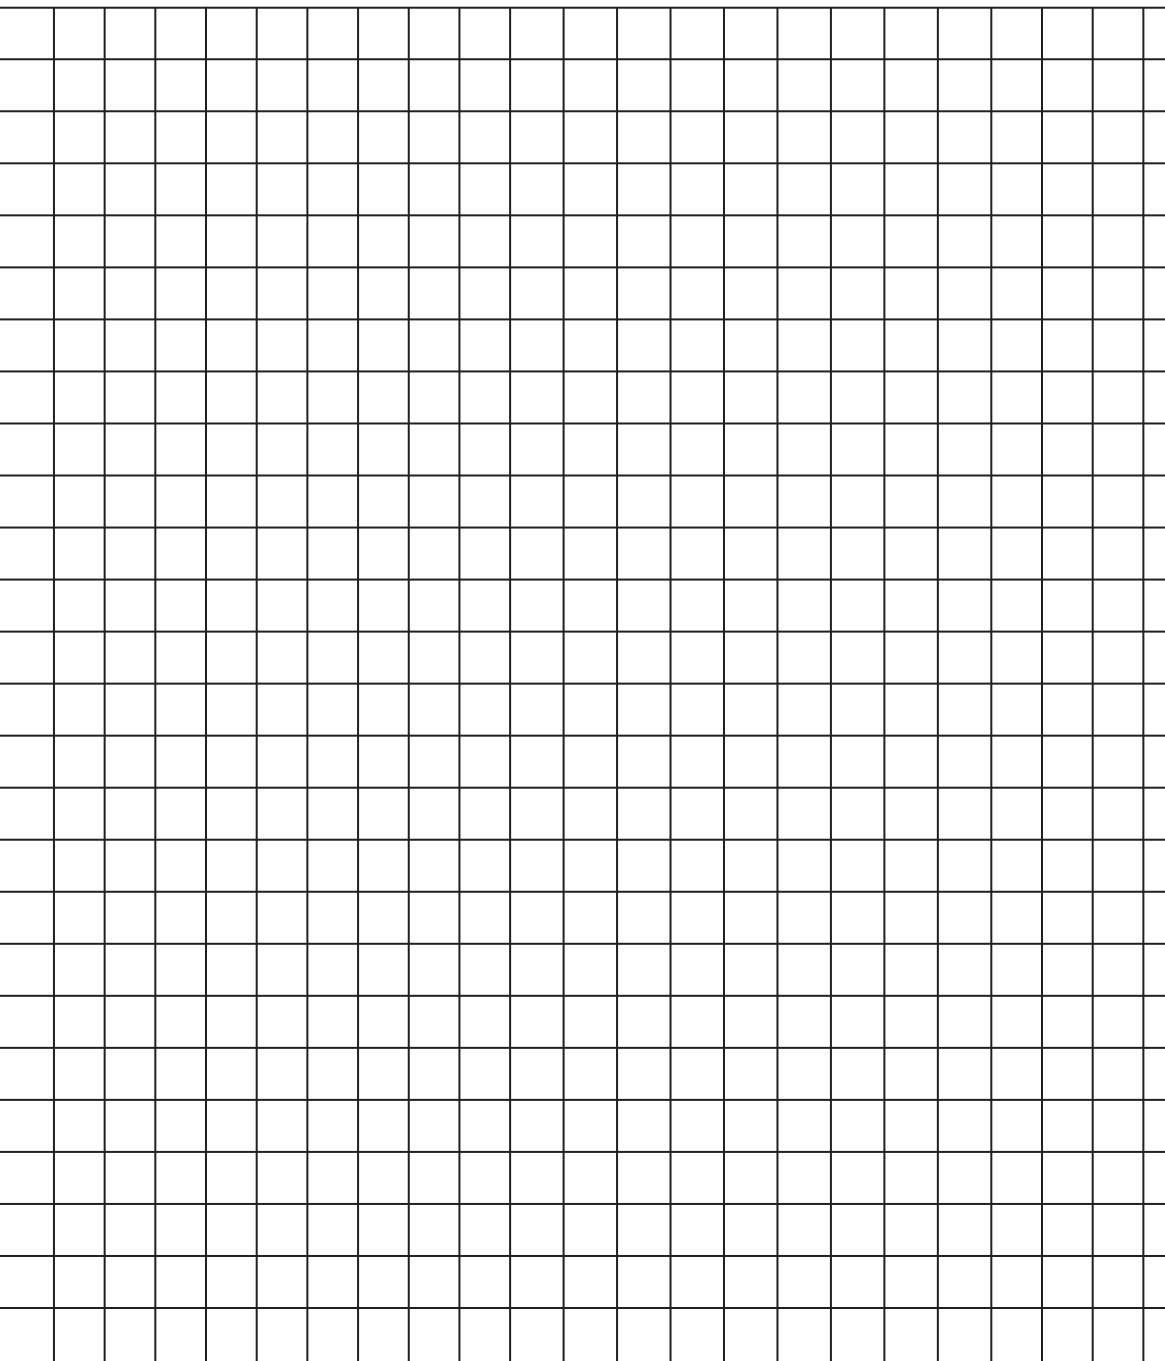

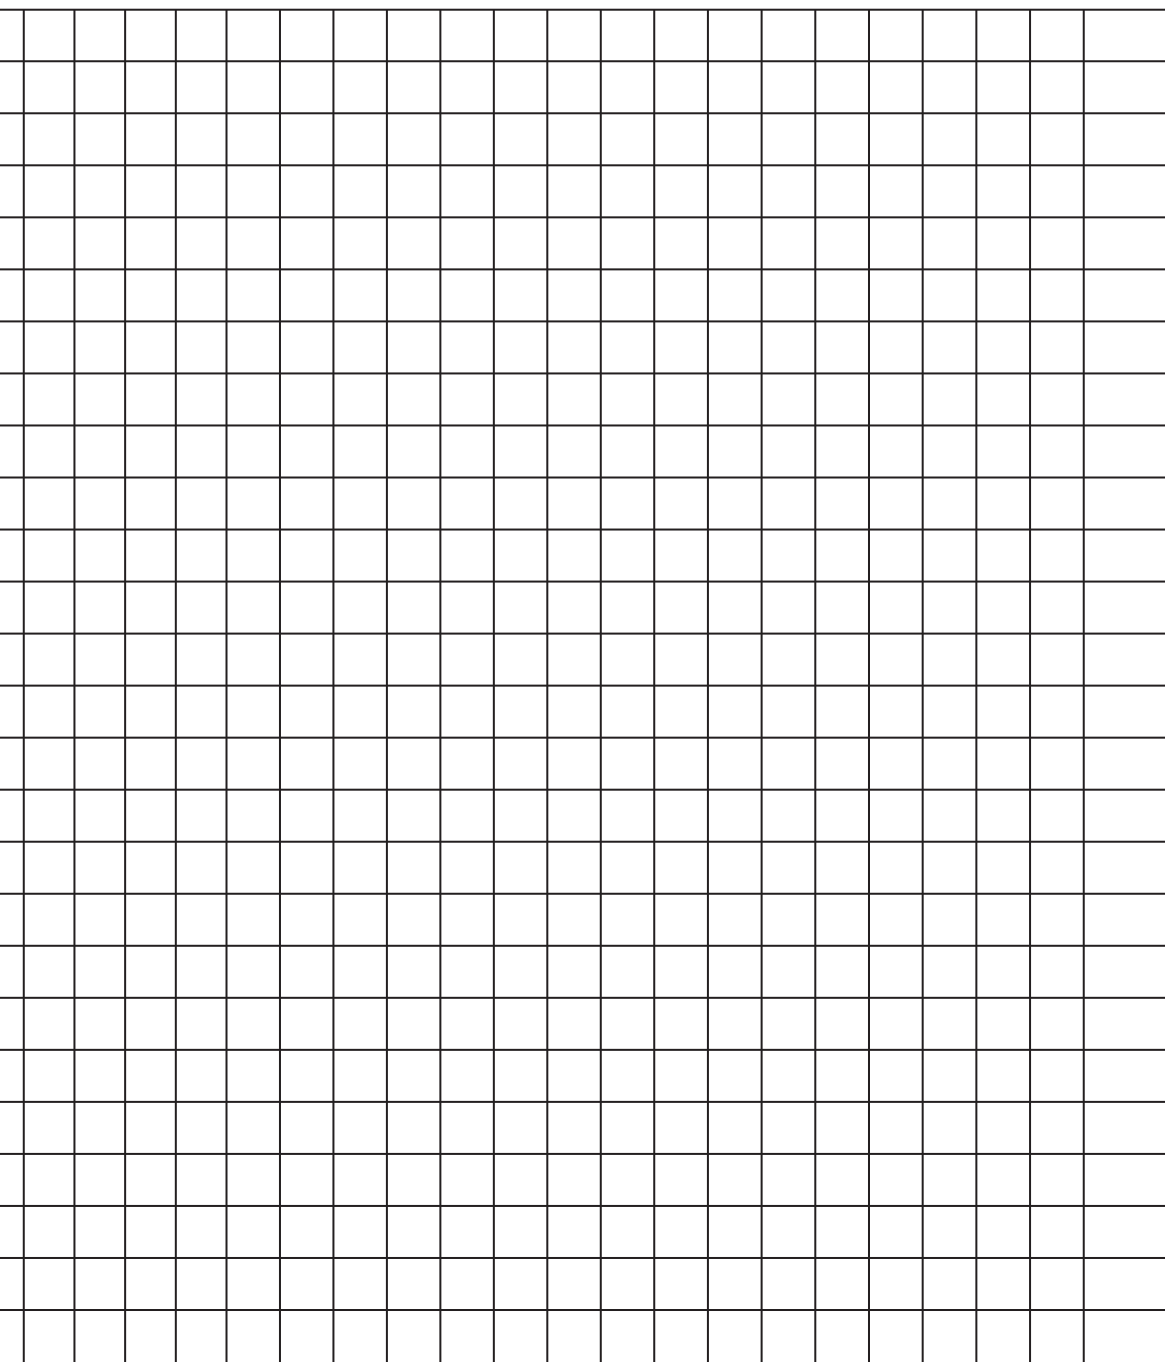

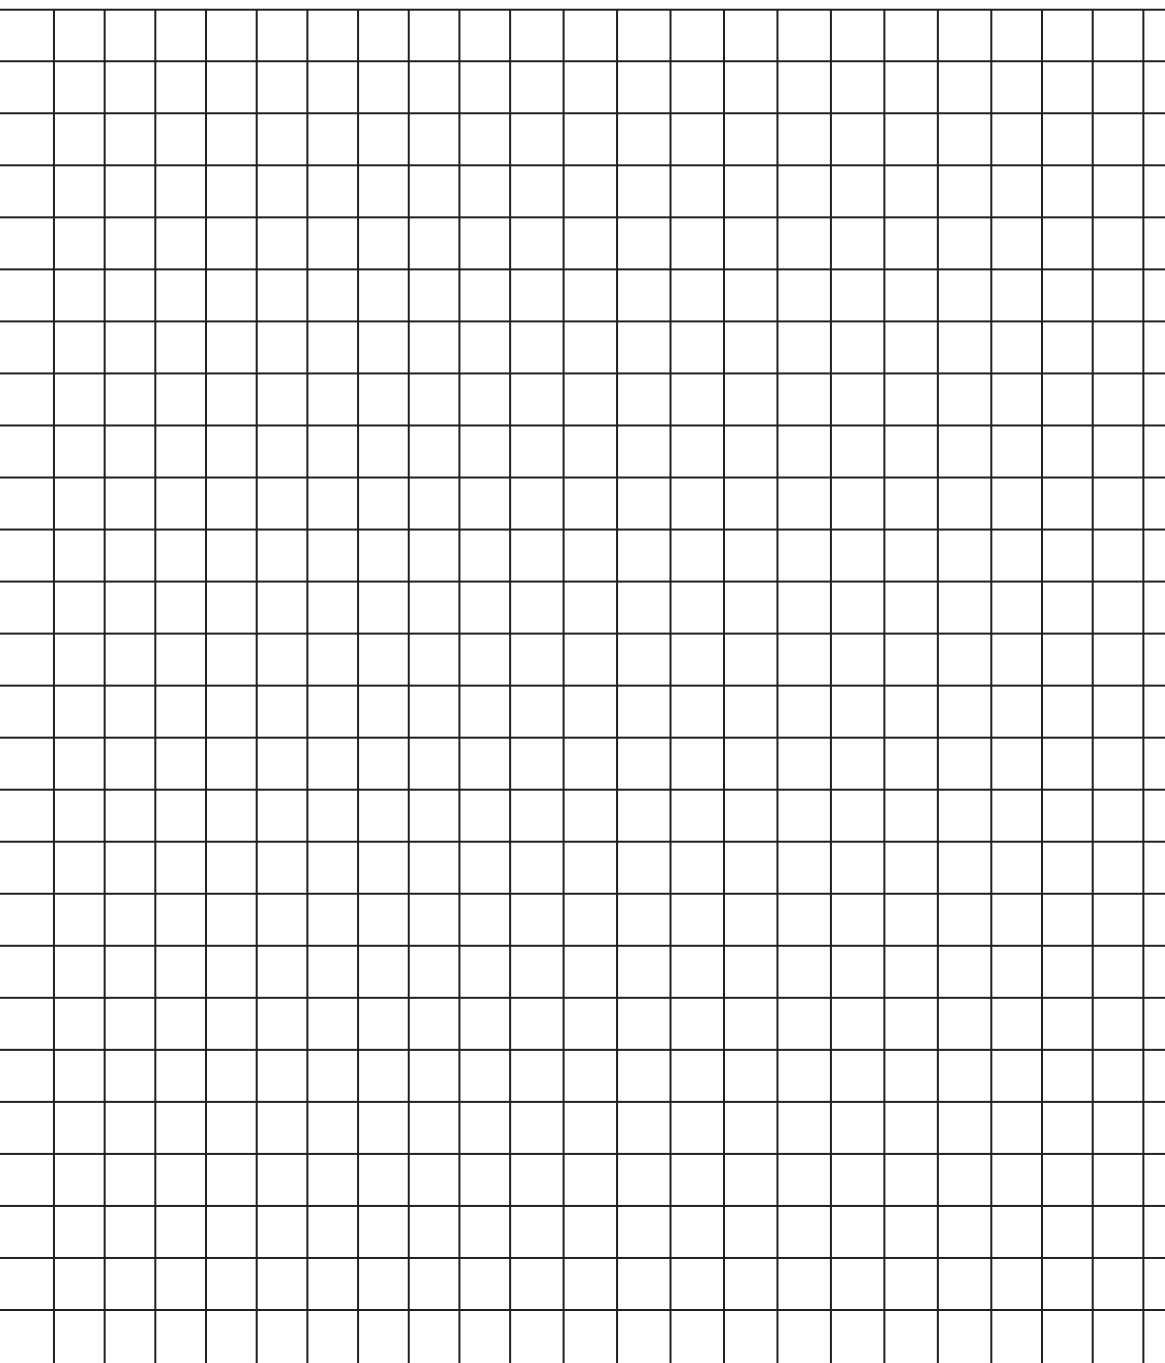

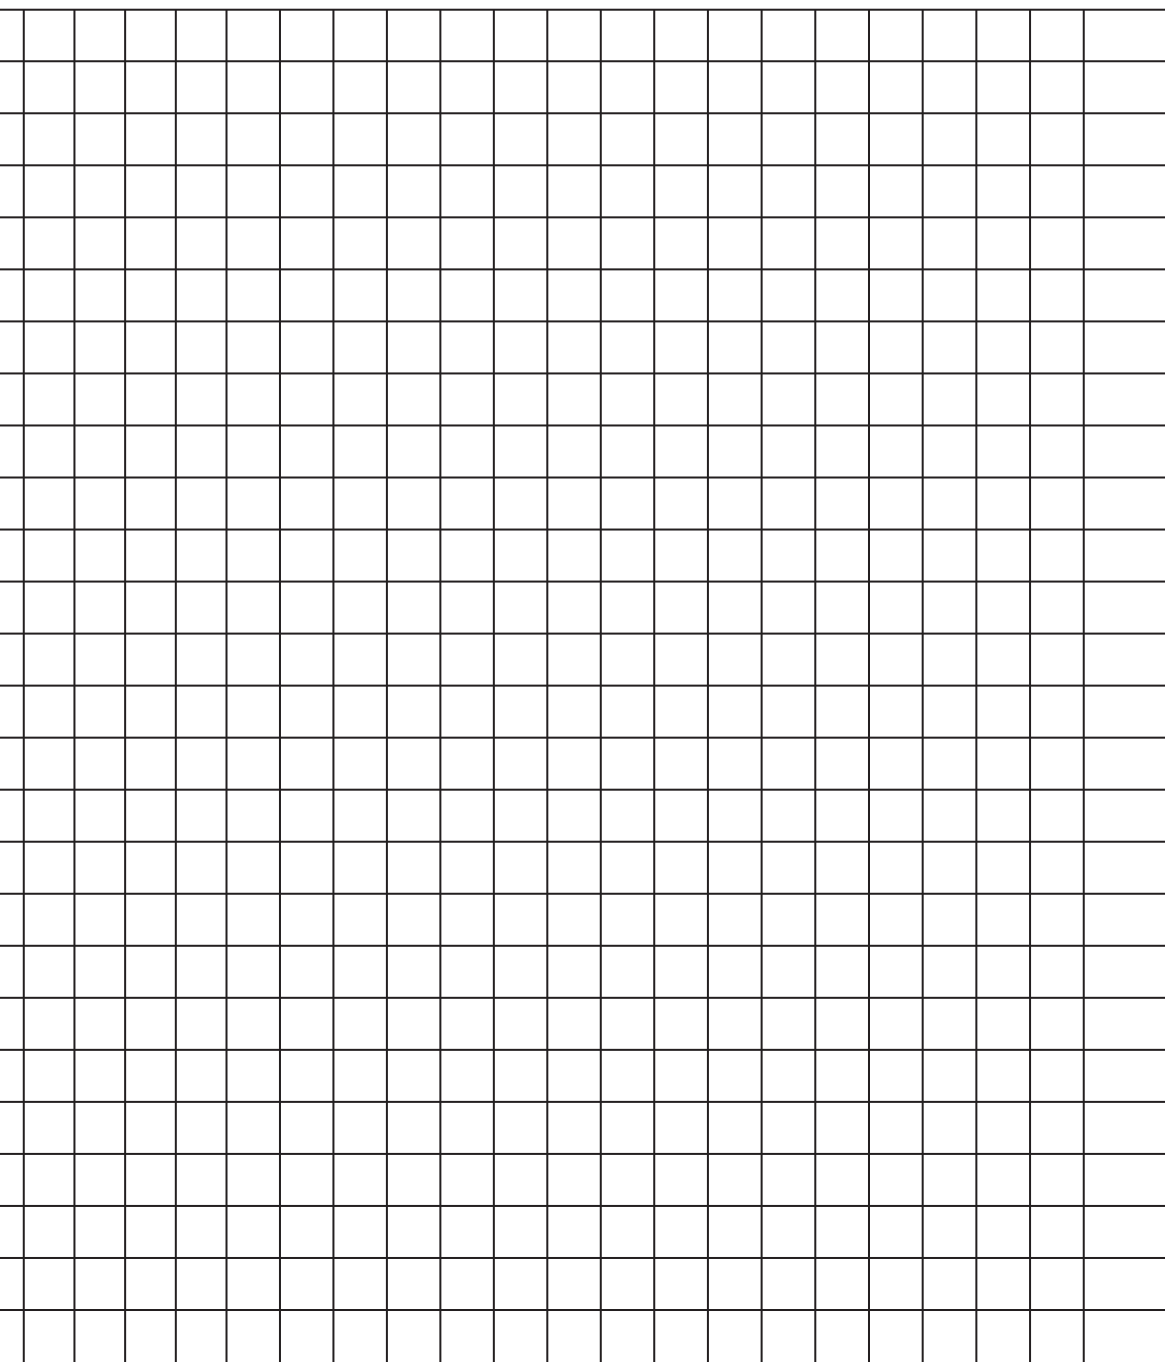

Notes:

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---



(y)

14	28	42	56	70	84	98	112	126	140	154	168	182	196
13	26	39	52	65	78	91	104	117	130	143	156	169	182
12	24	36	48	60	72	84	96	108	120	132	144	156	168
11	22	33	44	55	66	77	88	99	110	121	132	143	154
10	20	30	40	50	60	70	80	90	100	110	120	130	140
9	18	27	36	45	54	63	72	81	90	99	108	117	126
8	16	24	32	40	48	56	64	72	80	88	96	104	112
7	14	21	28	35	42	49	56	63	70	77	84	91	98
6	12	18	24	30	36	42	48	54	60	66	72	78	84
5	10	15	20	25	30	35	40	45	50	55	60	65	70
4	8	12	16	20	24	28	32	36	40	44	48	52	56
3	6	9	12	15	18	21	24	27	30	33	36	39	42
2	4	6	8	10	12	14	16	18	20	22	24	26	28
1	2	3	4	5	6	7	8	9	10	11	12	13	14

(x)

**How to work out how many  $m^2$  you need.**

**Step 1** - Find the length (y) and width (x) of your desired space on our chart above.

**Step 2** - Follow the lines up and across to find the  $m^2$  of the area you are paving.

*See our example highlighted above of how to find the  $m^2$ .*



# Notes:

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

